

LED Spotlight for track profiles.


Your partner for next-generation lighting

EOS

Beam diffusion angle: 20°/38°/60°
 Colour temperature : 2700K – 6500K
 Colour rendering index : >85Ra
 Power supply : 110~277 50~60
 Cos Φ : > 0.90




Model	Luminous flux
EOS-20W	2700 lm
EOS-35W	4700 lm

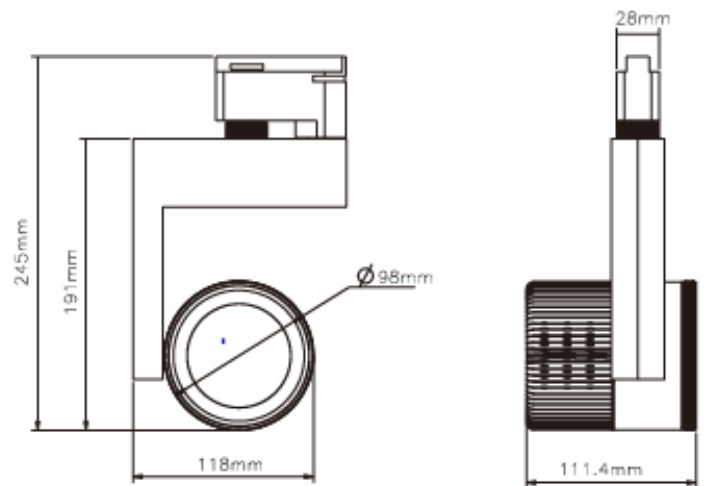

LED spotlights, integrating components from reputable suppliers (Samsung LED, CE approved power supply). The anodized aluminium housing and the unbreakable glass lens guarantee robustness and a long service life (50,000 hours).

This lamp is guaranteed for five years. Designed for office lighting applications thanks to its elegant and even distribution of light, it is also certified to comply with the latest European lighting standards.

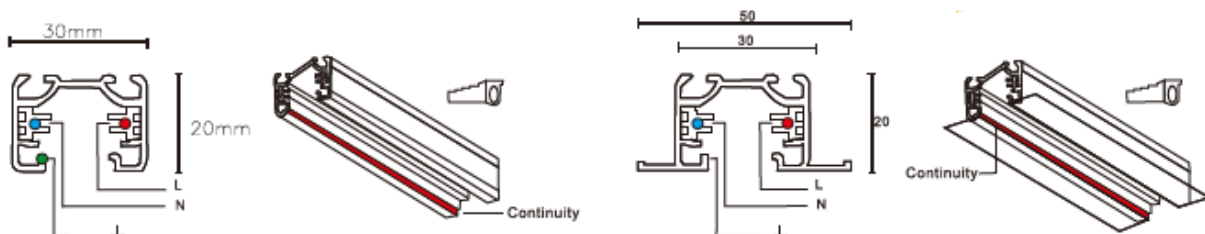

Also for systems: - STAFF, NORLUS, GLOBAL, NUCO et NORDIC with three circuits.