


ST11

Protection class : IP66
 Beam diffusion angle: IES type I - V.
 Colour temperature : 3000K – 5700K
 Colour rendering index : Ra70/Ra80
 Power supply : 110~277 50~60Hz
 Cos Φ : > 0.90

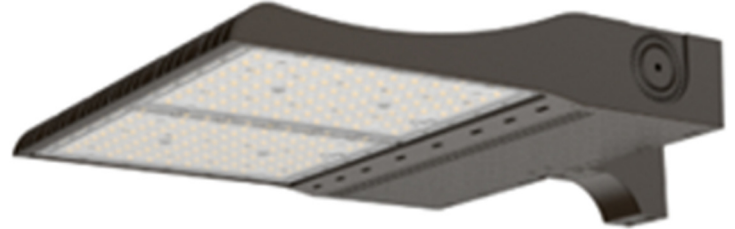

Four power rates available

Model	Luminous flux	Dimensions	Net weight
ST11-240W	32400 lm	685×362×94mm	9.3 kg
ST11-300W	40500 lm	685×362×94mm	9.9 kg
ST11-450W	60750 lm	740x658x104mm	19.9 kg
ST11-600W	81000 lm	740x658x104mm	21.4 kg

High quality LED projectors, integrating components from reputable suppliers (Seoul 5050 LED, Inventronics power supply). Thanks to the distribution of LEDs over a large area, the glare often associated with LEDs is limited and good heat dissipation is ensured. The anodized aluminium casing and the polycarbonate lens are sturdy and have a very long service life (Driver >50,000Hrs (@Ta=25°C), LED >110000hrs-L80 (@Ta=25°C)).

Available as option variable: 1-10V DC or daylight detection.

This lamp is guaranteed for five years, for heavy duty lighting applications, it is also certified to the latest European lighting standards.

ST11-600W - EPA 0.065

