


Your partner for next-generation lighting

## Séries - HP

Protection class : IP66  
 Beam diffusion angle: IES type I - V.  
 Colour temperature : 3000K – 5700K  
 Colour rendering index : Ra70/Ra80  
 Power supply : 110~277 50~60Hz  
 Cos  $\Phi$  : > 0.90

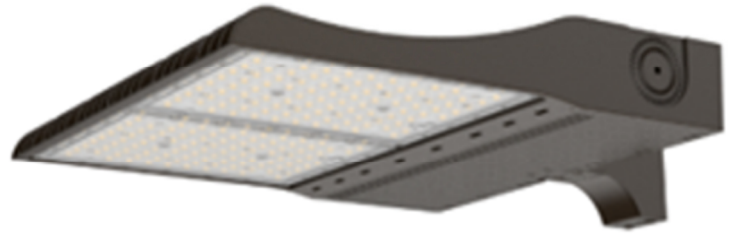

### Four power rates available

Model	Luminous flux	Dimensions	Net weight
Séries-HP-240W	32400 lm	703×322×139mm	8.6 kg
Séries-HP-300W	40500 lm	703×322×139mm	9.5 kg
Séries-HP-450W	60750 lm	752x598x145mm	16.0 kg
Séries-HP-600W	81000 lm	752x598x145mm	17.5 kg

High quality LED projectors, integrating components from reputable suppliers (Phillips LED, Meanwell power supply). Thanks to the distribution of LEDs over a large area, the glare often associated with LEDs is limited and good heat dissipation is ensured. The anodized aluminium casing and the polycarbonate lens are sturdy and have a very long service life (60,000 hours).

Available as option variable: 1-10V DC or daylight detection.

This lamp is guaranteed for five years, for heavy duty lighting applications, it is also certified to the latest European lighting standards.

### Series – HP 600W

